


## BACKLIT ECO 60x60



### Description:

ECO LED backlit panels are energy-efficient lighting solutions that provide bright, uniform illumination. They offer long-lasting performance and low heat emission, making it a practical choice for modern lighting applications.

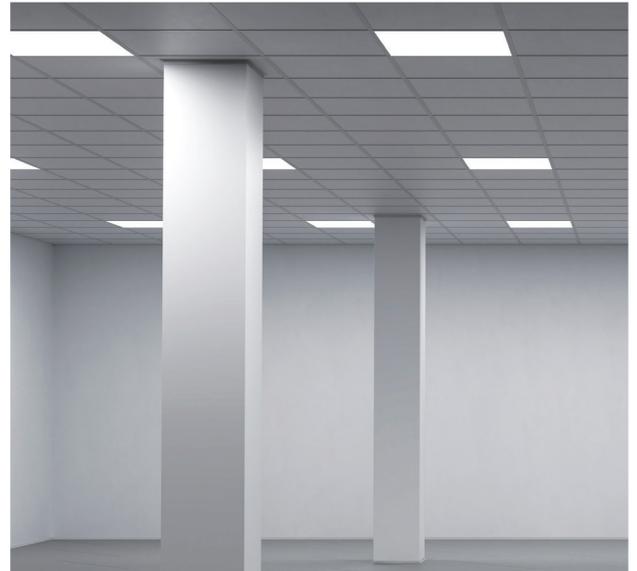

L80B80


### Specifications:

Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)		
								L	W	H
40W	4800lm	120lm/w	>0.95	≥ 80	3000-6500K	198-264 VAC	50 Hz	595	595	10


### Features:

Body Material	Finishing	Optics	Thermal Dissipation	Driver	Driver Mounting	Beam Angle
Aluminium Frame	Electrostatic Painting	PS Diffuser	Passive	Included	Separated	120°

### Photometric:

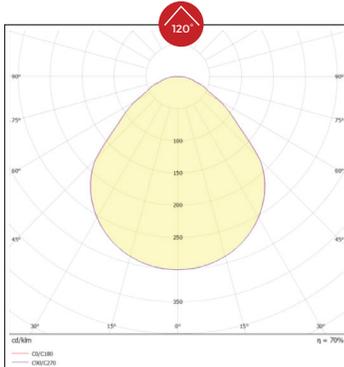

### General Dimensions:

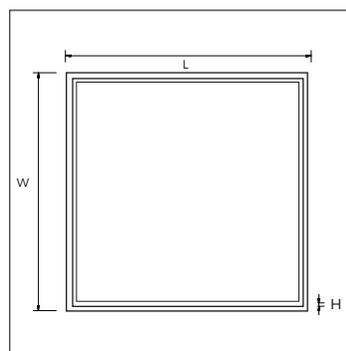

### Body Finish:

Matt White

### Applications:

