



APPLICATION



DIMENSIONS

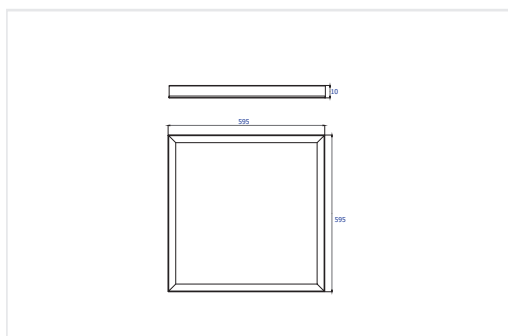

Photometric data

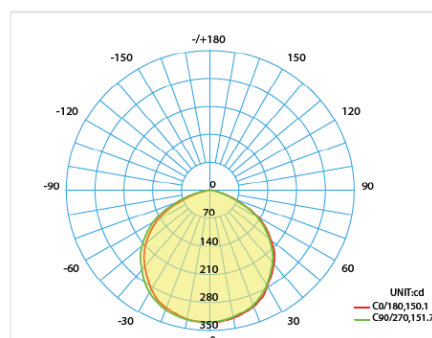

PHYSICAL CHARACTERISTICS

Installation	Recessed
Cut - out Size	None
Depth / Height	10 mm
LengthxWidth	595x595mm
IP - Rating	IP 40
IK - Rating Fixture	IK 02
Material Standard	Aluminium Frame with sheet steel back
Finish	Electrostatic White
Custom Colour	Available

ELECTRIC / PHOTOMETRIC DATA

LED chip efficacy	130 lm/W
Color Rendering index	Ra >80
Color Temperature	3000K/4000K/6000K
Beam Angle	120°
Glare Control	UGR < 20
Reflector/Diffuser	Opal Diffuser

SPECIFICATIONS

Code	Dimentions	Wattage	Total Luminous Flux	System Efficacy
CPS-E4A40-P5-****K-HC	600x600 mm	40 W	3800	90 lm/W

Specification

****K">>3000K>>3000K
 ****K">>4000K>>4000K
 ****K">>6000K>>6000K

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
A+	220 - 240 V AC	50 / 60 Hz	II	-20° C / + 40° C	50.000 Hrs