



ZODIACII



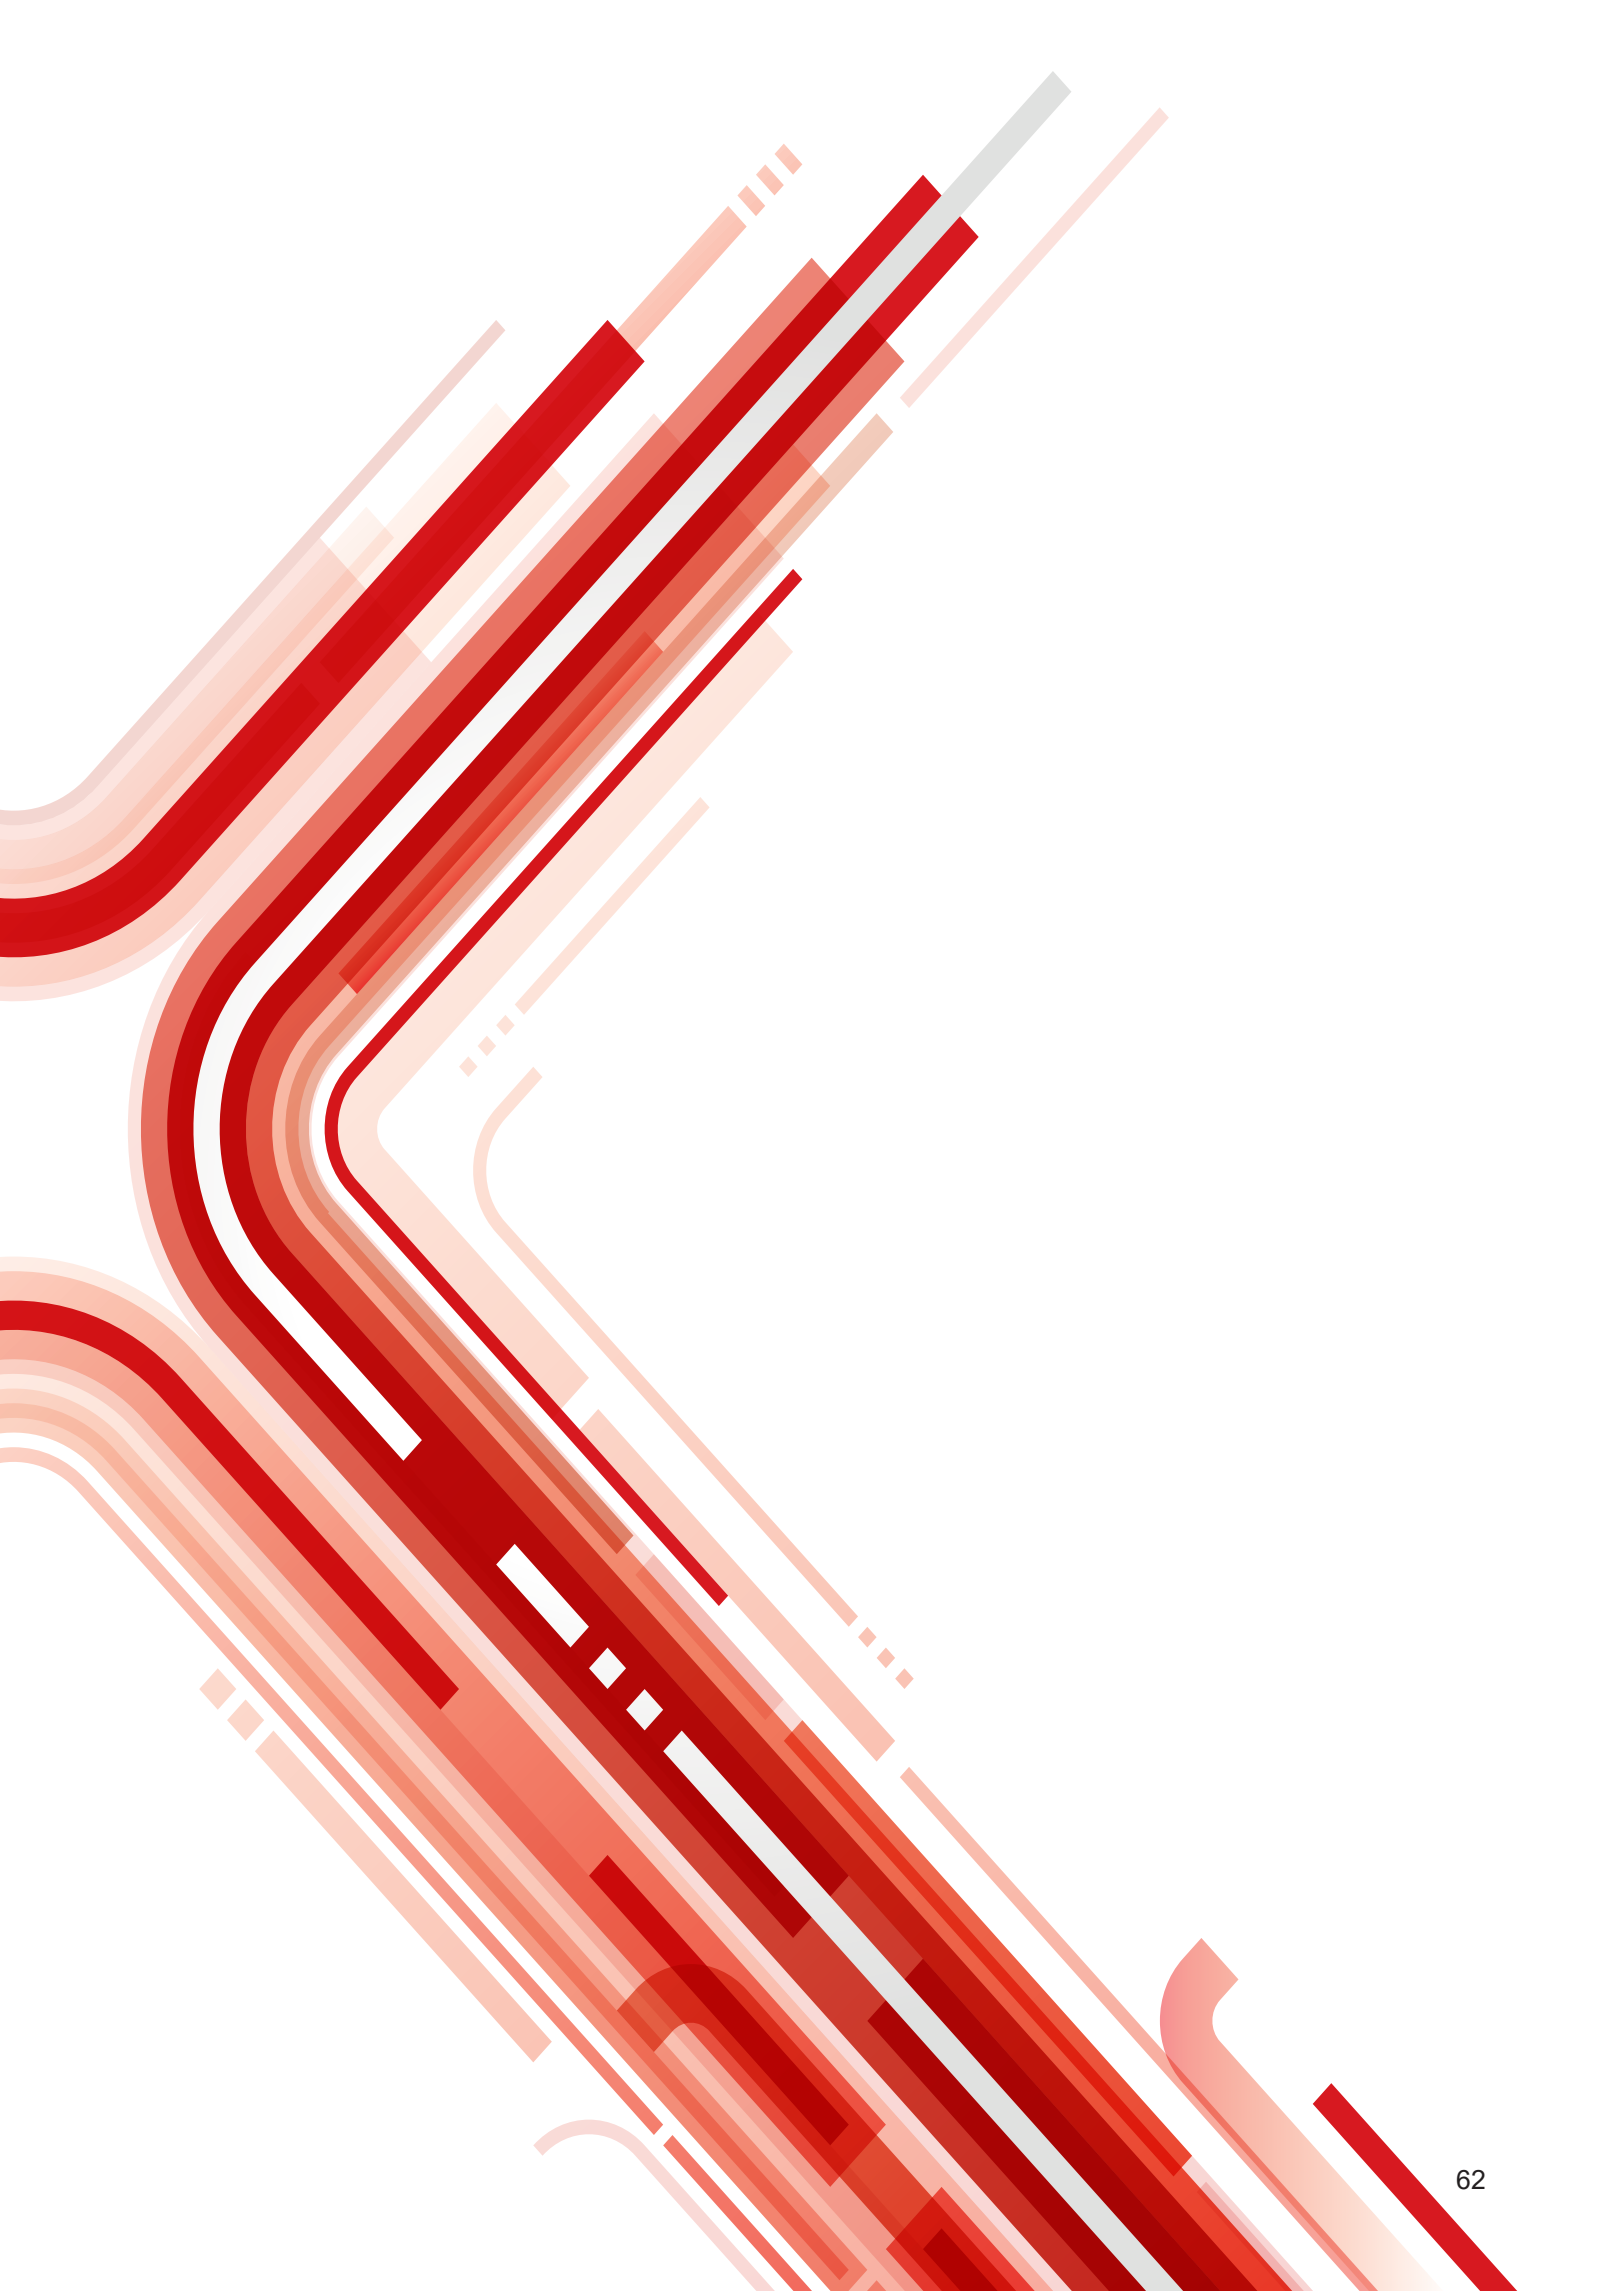

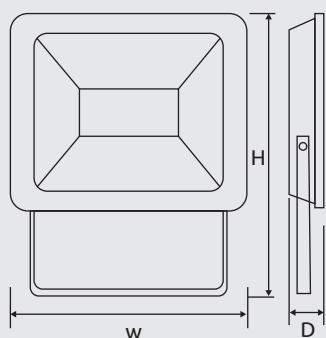

LED

IP65

High Efficiency

F



30,000 HOURS



IK08



Product Code

ZODIAC II 100w

Color

Black

General Specifications

Product type : Flood Light

Mounting type : By bracket

Description : Zodiac floodlights are ideal for outdoor use that ensure an excellent quality of light, it has an optimized weight and size due to its compact design, very homogenous light, energy saving up to 90% comparing to traditional floodlights.

Category : Outdoor light

Applications : Warehouse, parking, advertising signs and façade lighting.

Lighting Specifications

Wattage : 100 w

Delivered lumen : 10000 lm

Efficacy : ≥ 100 lm/w

Power Factor : 0.95

CRI : ≥ 80

Color temperature : 3000 k : 6500 k

Rated lifetime : 30,000 hrs.

Physical Specifications

Body : High pressure die cast aluminum housing

Finishes : Electrostatic painting

Diffuser : Toughened glass, high strength, impact resistance

Thermal Dissipation : Passive

Electrical Specifications

Driver : Included

Driver mounting : Integrated

Voltage : 185-265 VAC

Frequency : 50 Hz

Dimensions

Width : 268 mm

Depth : 41mm

Height : 328mm

Optical Specifications

Aiming : (Fixing arm) Rotatable 180°


Light distribution : Symmetric

Light emission : Direct


Beam angle : 110°

ZODIAC II

Photometric

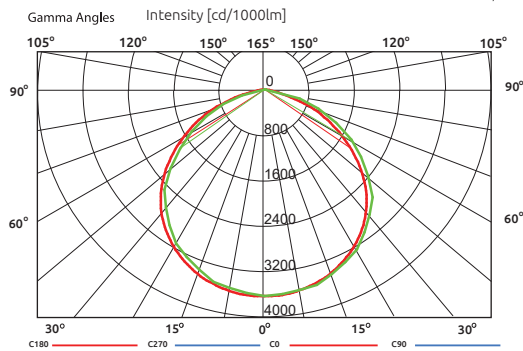

Cone Diagram

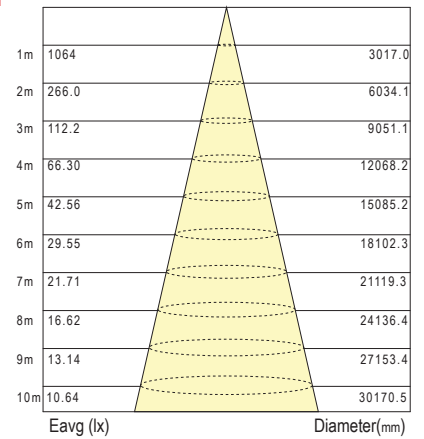

Pictures & Accessories



Applications

