


APPLICATION



DIMENSIONS

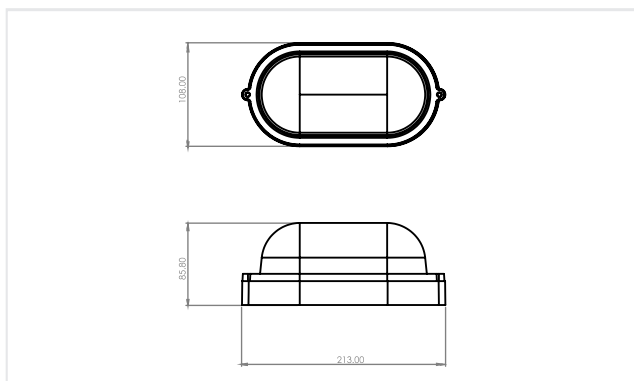

PHYSICAL CHARACTERISTICS

Installation	Surface Mounted
Length/Diameter	213 mm
Width	107mm
Height	95mm
Material Standard	Die Cast Aluminum
IP - Rating	IP54
Standard Finish	Electrostatic Painted
Color	Available

ELECTRICAL / PHOTOMETRIC DATA

Light Source	Led Lamp
Chromaticism Tolerance	6- Step Mac Adams
Color Rendering Index	Ra >80
Color Temp.	3000K -6500K
Beam Angle	120°
Glare Control	UGR < 20
Diffuser	Aluminum diffuser
Power Factor	>0.95

SPECIFICATIONS

Code	Power	Lamp Luminous Flux	Lamp Efficacy
BLK3021	5W	500 lm	100 lm/W
BLK3022	9W	900 lm	
BLK3023	12W	1055 lm	
BLK3028			

MISCELLANEOUS SPECIFICATIONS

Energy Class	Mains Voltage	Frequency	Safety Class	Operational Temp.	Rated Service Life (H)
+A	220 - 240 V AC	50 / 60 Hz	II	-10° C / + 45° C	25.000 Hrs