

variable speed drive, ATV320, 4 kW, 380...500 V, 3 phases, compact

ATV320U40N4C

Main

Range of product	Altivar Machine ATV320	
Product or component type	Variable speed drive	
Product specific application	Complex machines	
Variant	Standard version	
Format of the drive	Compact	
Mounting mode	Wall mount	
communication port protocol	Modbus serial CANopen	
Option card	Communication module, CANopen Communication module, EtherCAT Communication module, Profibus DP V1 Communication module, PROFINET Communication module, Ethernet Powerlink Communication module, EtherNet/IP Communication module, DeviceNet	
[Us] rated supply voltage	380500 V - 1510 %	
nominal output current	9.5 A	
Motor power kW	4.0 kW for heavy duty	
EMC filter	Class C2 EMC filter integrated	
IP degree of protection	IP20	

Complementary

Discrete input number	7	
Discrete input type	STO safe torque off, 24 V DC, impedance: 1.5 kOhm DI1DI6 logic inputs, 24 V DC (30 V) DI5 programmable as pulse input: 030 kHz, 24 V DC (30 V)	
Discrete input logic	Positive logic (source) Negative logic (sink)	
Discrete output number	3	
Discrete output type	Open collector DQ+ 01 kHz 30 V DC 100 mA Open collector DQ- 01 kHz 30 V DC 100 mA	
Analogue input number	3	
Analogue input type	Al1 voltage: 010 V DC, impedance: 30 kOhm, resolution 10 bits Al2 bipolar differential voltage: +/- 10 V DC, impedance: 30 kOhm, resolution 10 bit Al3 current: 020 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by configuration), impedance: 250 Ohm, resolution 10 bits	
Analogue output number	1	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Analogue output type	Software-configurable current AQ1: 020 mA impedance 800 Ohm, resolution 10 bits Software-configurable voltage AQ1: 010 V DC impedance 470 Ohm, resolution 10 bits	
	DIES	
Relay output type	Configurable relay logic R1A 1 NO electrical durability 100000 cycles Configurable relay logic R1B 1 NC electrical durability 100000 cycles	
	Configurable relay logic R1D 1 NC electrical durability 100000 cycles	
	Configurable relay logic R2A 1 NO electrical durability 100000 cycles Configurable relay logic R2C	
Maximum switching current	Relay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 250 V AC	
	Relay output R1A, R1B, R1C on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7	
	ms: 2 A at 250 V AC Relay output R1A, R1B, R1C, R2A, R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC	
	Relay output R2A, R2C on resistive load, cos phi = 1: 5 A at 250 V AC Relay output R2A, R2C on resistive load, cos phi = 1: 5 A at 30 V DC	
Minimum switching current	Relay output R1A, R1B, R1C, R2A, R2C: 5 mA at 24 V DC	
Method of access	Slave CANopen	
4 quadrant operation possible	True	
Asynchronous motor control	Voltage/frequency ratio, 5 points	
profile	Flux vector control without sensor, standard Voltage/frequency ratio - Energy Saving, quadratic U/f	
	Flux vector control without sensor - Energy Saving	
	Voltage/frequency ratio, 2 points	
Synchronous motor control profile	Vector control without sensor	
Transient overtorque	170200 % of nominal motor torque	
Maximum output frequency	0.599 kHz	
Acceleration and deceleration ramps	Linear U	
	S	
	CUS Ramp switching	
	Acceleration/deceleration ramp adaptation	
	Acceleration/deceleration automatic stop with DC injection	
Motor slip compensation	Automatic whatever the load	
	Adjustable 0300 % Not available in voltage/frequency ratio (2 or 5 points)	
Switching frequency	216 kHz adjustable	
	416 kHz with derating factor	
Nominal switching frequency	4 kHz	
Braking to standstill	By DC injection	
Brake chopper integrated	True	
Line current	13.7 A at 380 V (heavy duty) 10.6 A at 500 V (heavy duty)	
Maximum input current	13.7 A	
Maximum output voltage	500 V	
Apparent power	9.2 kVA at 500 V (heavy duty)	
Network frequency	5060 Hz	
Relative symmetric network frequency tolerance	5 %	
Prospective line Isc	5 kA	
Base load current at high overload	9.5 A	
Power dissipation in W	Fan: 111 W at 380 V, switching frequency 4 kHz	
With safety function Safely Limited Speed (SLS)	True	

With safety function Safe brake management (SBC/SBT)	False
With safety function Safe Operating Stop (SOS)	False
With safety function Safe Position (SP)	False
With safety function Safe programmable logic	False
With safety function Safe Speed Monitor (SSM)	False
With safety function Safe Stop 1 (SS1)	True
With sft fct Safe Stop 2 (SS2)	False
With safety function Safe torque off (STO)	True
With safety function Safely Limited Position (SLP)	False
With safety function Safe Direction (SDI)	False
Protection type	Input phase breaks: drive Overcurrent between output phases and earth: drive Overheating protection: drive Short-circuit between motor phases: drive Thermal protection: drive
Width	140 mm
Height	184.0 mm
Depth	158.0 mm
Product weight	2.2 kg

Environment

Operating position	Vertical +/- 10 degree	
Product certifications	CE ATEX NOM GOST EAC RCM KC	
Marking	CE ATEX UL CSA EAC RCM	
Standards	IEC 61800-5-1	
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 Voltage dips and interruptions immunity test conforming to IEC 61000-4-11	
Environmental class (during operation)	Class 3C3 according to IEC 60721-3-3 Class 3S2 according to IEC 60721-3-3	
Maximum acceleration under shock impact (during operation)	150 m/s² at 11 ms	
Maximum acceleration under vibrational stress (during operation)	10 m/s² at 13200 Hz	
Maximum deflection under vibratory load (during operation)	1.5 mm at 213 Hz	
Permitted relative humidity (during operation)	Class 3K5 according to EN 60721-3	

Volume of cooling air	37.7 m3/h
overvoltage category	III
Regulation loop	Adjustable PID regulator
Speed accuracy	+/- 10 % of nominal slip 0.2 Tn to Tn
pollution degree	2
Ambient air transport temperature	-2570 °C
Ambient air temperature for operation	-1050 °C without derating 5060 °C with derating factor
Ambient air temperature for storage	-2570 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	24.500 cm
Package 1 Width	19.100 cm
Package 1 Length	27.000 cm
Package 1 Weight	2.769 kg
Unit Type of Package 2	S06
Number of Units in Package 2	12
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	46.516 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	2476
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	6bbbffbe-8a69-47e2-9c29-bc773d0b789b
China RoHS Regulation	China RoHS declaration
[⋯] Energy efficiency	
Product contributes to saved and avoided emissions	Yes


Use Again


○ Repack and remanufacture	
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Take-back	No

Dimensions Drawings


Dimensions

Right View, Front View and Front View with EMC Plate

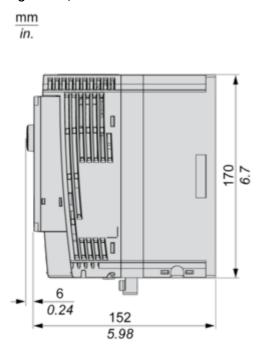

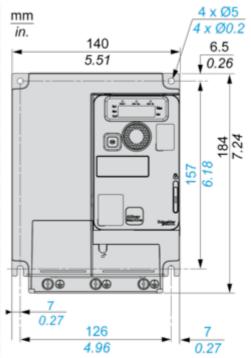


 $\frac{\text{mm}}{in.}$

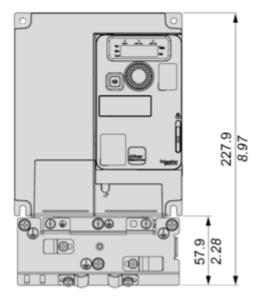

Mounting and Clearance


Mounting Types

Mounting Type A: Individual with Ventilation Cover

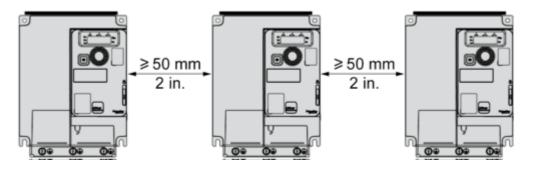


Only Possible at Ambient Temperature Less or Equal to 50 °C (122 °F)

Mounting Type B: Side by Side, Ventilation Cover Removed

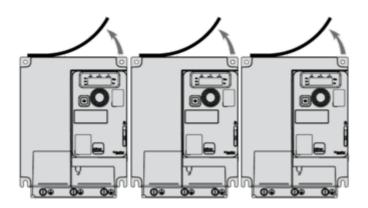

Mounting Type C: Individual, Ventilation Cover Removed

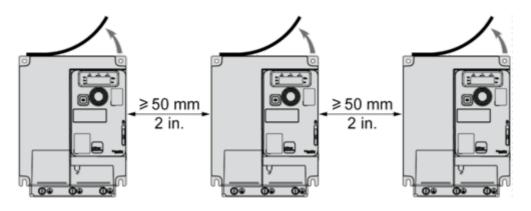

For Operation at Ambient Temperature Above 50 $^{\circ}\text{C}$ (122 $^{\circ}\text{F})$


ATV320U40N4C

Connections and Schema

Connection Diagrams

Diagram with Line Contactor

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

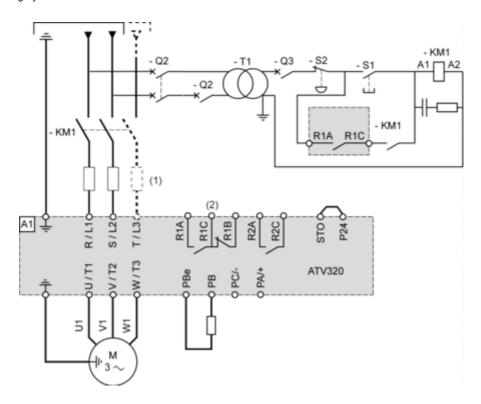


- (1) Line choke (if used)
- (2) Fault relay contacts, for remote signaling of drive status

Diagram with Switch Disconnect

Connection diagrams conforming to standards EN 954-1 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.


Product datasheet

ATV320U40N4C

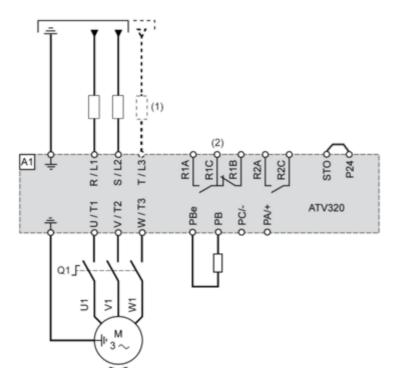

- (1) Line choke (if used)(2) Fault relay contacts, for remote signaling of drive status

Control Connection Diagram in Source Mode

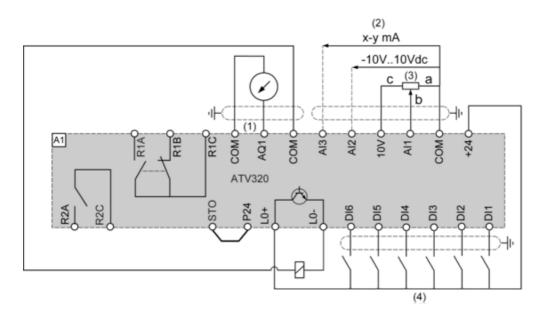


- (1) Analog output
- (2) Analog inputs
- (3) Reference potentiometer (10 kOhm maxi)
- (4) Digital inputs


Digital Inputs Wiring

The logic input switch (SW1) is used to adapt the operation of the logic inputs to the technology of the programmable controller outputs.


Switch SW1 set to "Source" position and use of the output power supply for the DIs.

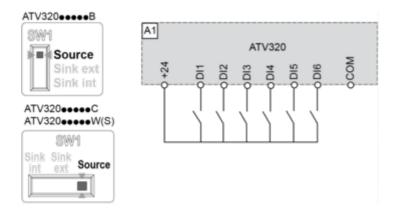

Switch SW1 set to "Source" position and use of an external power supply for the DIs.

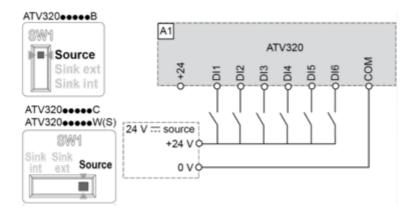


Switch SW1 set to "Sink Int" position and use of the output power supply for the DIs.

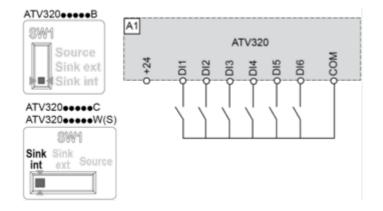

Switch SW1 set to "Sink Ext" position and use of an external power supply for the DIs.


Product datasheet

ATV320U40N4C

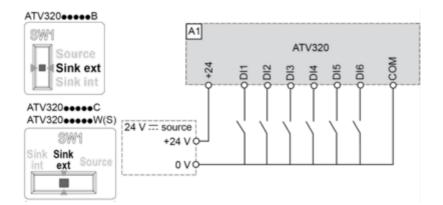

Performance Curves

Derating Curves

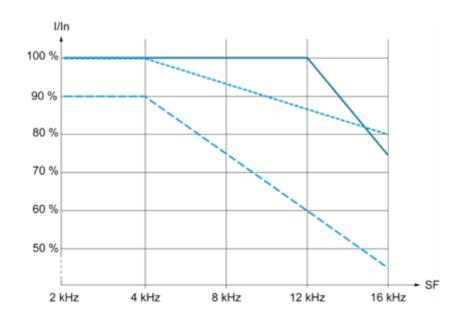

40 °C (104 °F) - Mounting type A, B and C

60 °C (140 °F) - Mounting type C In: Nominal Drive Current

SF: Switching Frequency

13