

FLOODLIGHTS
ZODIAC G3



Description:

ZODIAC G3 floodlight fixtures are designed to bring the security and safety to variety of outdoor areas and large architectural facades, combining elegance, performance and durability.




Specifications:

Wattage	Lumen	Efficacy	Power Factor	CRI	CCT	Voltage	Frequency	Dimensions (mm)		
								L	W	D
50W	7000lm	140lm/w	>0.95	≥ 80	3000-6500K	100-240/277 VAC	50/60 Hz	238	293	63
100W	14000lm	140lm/w	>0.95	≥ 80	3000-6500K	140-305 VAC	50/60 Hz	238	293	63
150W	21000lm	140lm/w	>0.95	≥ 80	3000-6500K	140-305 VAC	50/60 Hz	338	338	63
200W	28000lm	140lm/w	>0.95	≥ 80	3000-6500K	140-305 VAC	50/60 Hz	338	338	63


Features:

Body Material	Finishing	Optics	Driver	Driver Mounting	Beam Angle
Die Cast Aluminium	Electrostatic Painting	PC Covered with Tempered Glass	Included	Integrated	30°, 60°, 100° Type II & Type ME


Photometric:

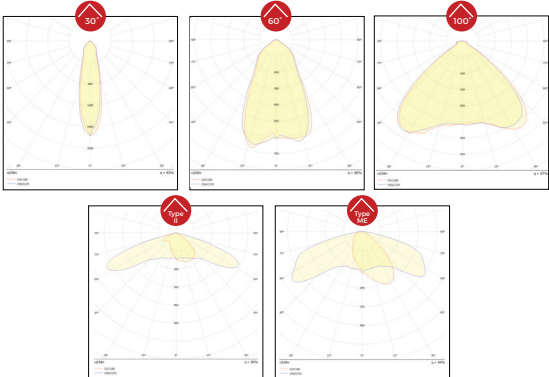

General Dimensions:

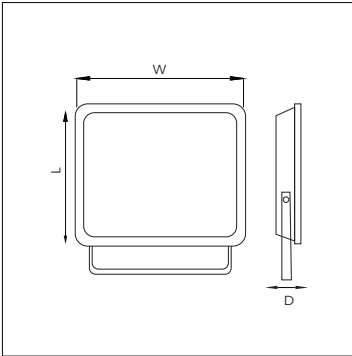

Body Finish:



Applications:

