


ZODIACII





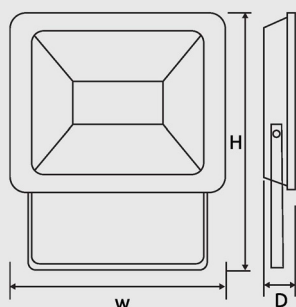

LED

IP65

High Efficiency

F

30,000 HOURS

30,000 HOURS

IK08

IK08

IK08

IK08

Product Code

ZODIAC II150w

Color

Black

General Specifications

Product type : Flood Light

Mounting type : By bracket

Description : Zodiac II Floodlights are ideal for outdoor use that ensure an excellent quality of light, it has an optimized weight and size due to its compact design, very homogenous light, energy saving up to 90% comparing to traditional floodlights.

Category : Outdoor light

Applications : Warehouse, parking, advertising signs and façade lighting.

Lighting Specifications

Wattage : 150 w

Delivered lumen : 15000 lm

Efficacy : ≥ 100 lm/w

Power Factor : 0.95

CRI : ≥ 80

Color temperature : 3000 k : 6500 k

Rated lifetime : 30,000 hrs.

Physical Specifications

Body : High pressure die cast aluminum housing

Finishes : Electrostatic painting

Diffuser : Toughened glass, high strength, impact resistance

Thermal Dissipation : Passive

Electrical Specifications

Driver : Included

Driver mounting : Integrated

Voltage : 185-265 VAC

Frequency : 50 Hz

Dimensions

Width : 380mm

Depth : 45 mm

Height : 305 mm

Optical Specifications


Aiming : (Fixing arm) Rotatable 180°

Light distribution : Symmetric


Light emission : Direct

Beam angle : 110°

Photometric

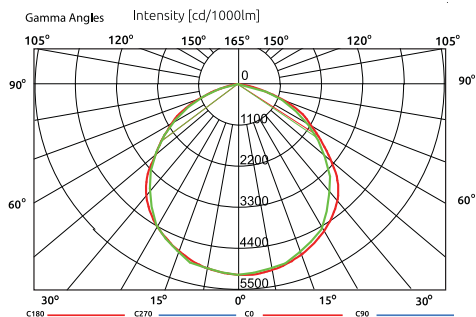

Cone Diagram

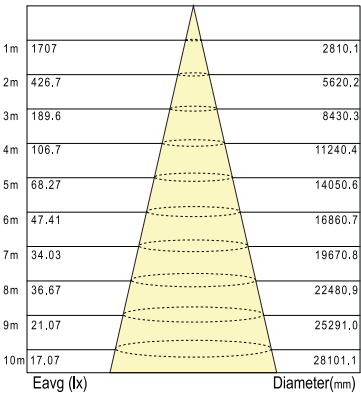

Pictures & Accessories



Applications

