


Product Datasheet

Type: Floodlight

PRODUCT FEATURES

Body	Die cast Aluminum
Diffuser	Tempering Glass
Housing Color	Black
Material of heat sink	ADC12
CCT	3000K - 6500K
Luminous Efficiency	100LM/W -115LM/W
CRI	≥80
Beam Angel	110°
IP	65
Input Voltage	AC 170-265V
Frequency	50/60HZ
Surge Protection	L-N: 1KV, L/N PE: 2KV
Dielectric Strength	L, N-PE: 1500 VAC <10 mA
Operating Temperature	-20°C~45°C
Rated Life span	25000 HRS
Warranty	3 Years

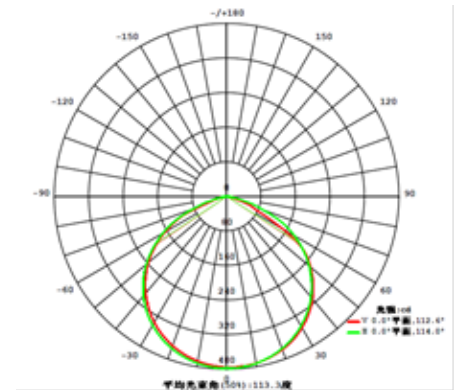

Power	30W	50W	100W	150W	200W
Lumen	3000Lm	5000Lm	10000Lm	15000Lm	20000Lm
Current	0.130A	0.220A	0.460A	0.65A	0.87A
Power Factor	≥0.9	≥0.9	≥0.95	≥0.95	≥0.95
Dimension	133×124×29mm	177×146×28mm	259×220×35mm	289×262×36mm	341×311×36mm
Weight	315g	480g	1090g	1550g	2030g