




Bare TLED Waterproof TLED (Double & Single ended)


Dec 2019

Bare TLED Waterproof

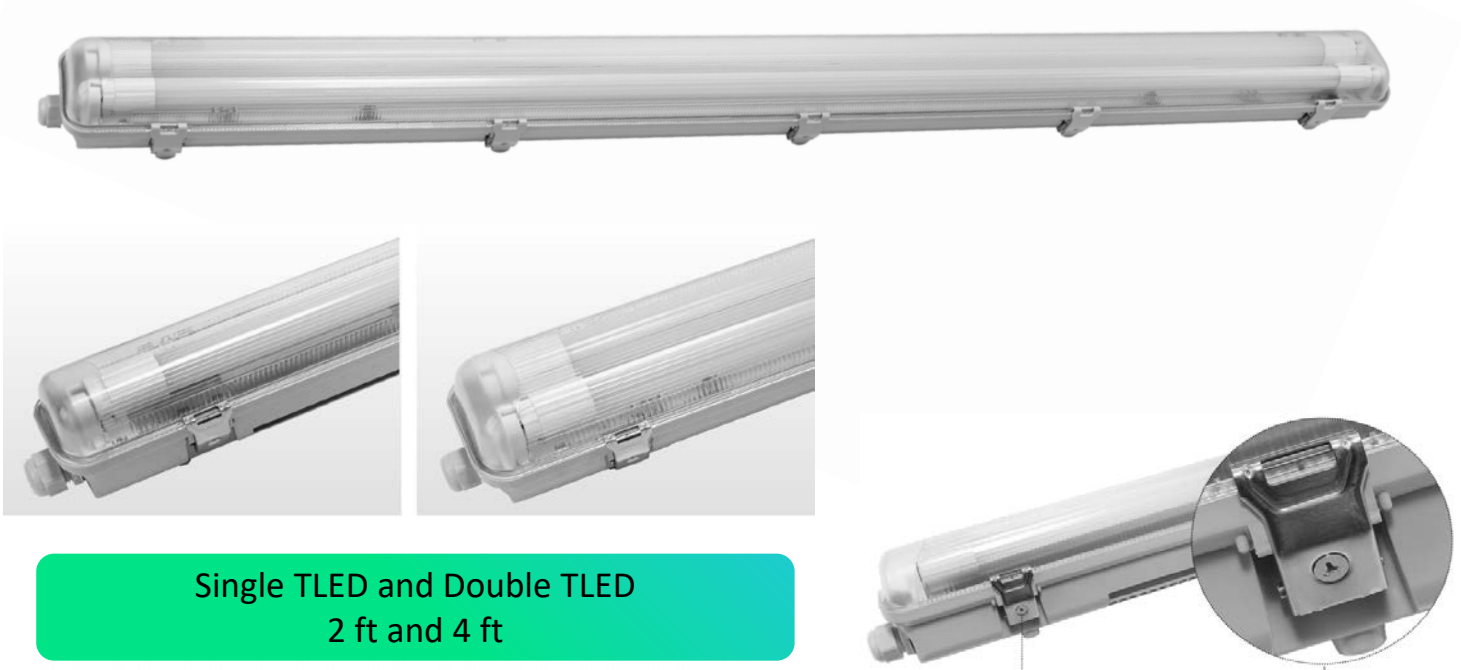

Single TLED and Double TLED
2 ft and 4 ft

Steel Clips

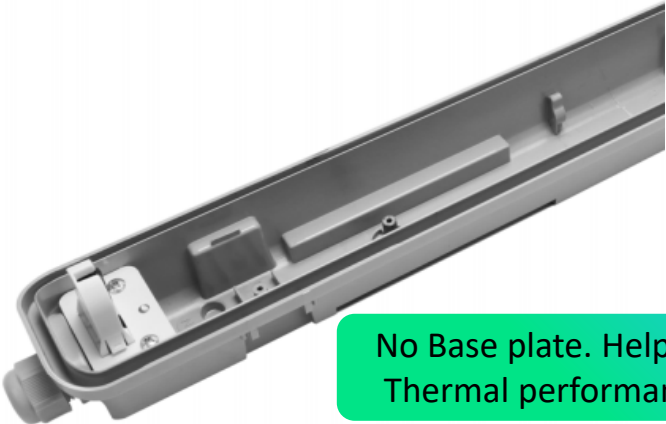

No Base plate. Helps in
Thermal performance

	Bare TLED Waterproof
Safety Class (driver+system)	Class II
Housing material	PC
Cover material (Diffuser)	PC
Clips	Stainless Steel
Cable Gland	M20 (same as Coreline Waterproof)
IPxx	IP65
IKxx	IK08
Ball-proof	follow IEC
Glow wire rating	850C
fire-rated	follow IEC
Mounting	Via SS Brackets
Power connection	Through connector (integrated fuse)
Color(s)	Light Grey (same as coreline waterproof)
Packaging concept	1-in-1 + carton box
Temperature Range (depending on TLED)	-20C - +45C (housing)
Luminaire Service class	B
Ta	25C
RoHS/REACH	Yes

Certification: CB (IEC 60598)